



MANUFACTURER NEWLIFE MAGNETICS

SPECIFICATION SHEET


MAGNET SHEETING WITH MATT WHITE VINYL

Edition: A0 NO:NMEQS-NLVN001


FEATURES AND ADVANTAGES:

- Matte white vinyl bonded to magnet sheeting, is compatible for Solvent, UV curable and UV screen printing.
- Magnet sheeting is attracted to iron, easy to apply, remove and change, without leaving any residue.
- Will not demagnetize, anti-rust

CONSTRUCTION DRAWING:

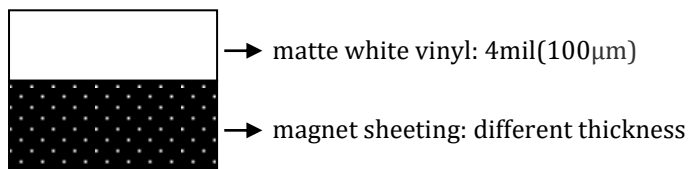

PACKAGING:

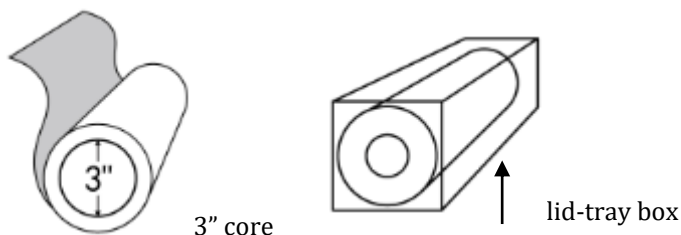

PROCESS AND STORAGE:

- Working condition: temperature 15°C/59°F to 30°C/86°F, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C /104°F daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C/50°F to 35°C/95°F, relative humidity 20% to 70%
- Shelf life: 12 months under normal storage conditions. Unfinished material should be re-packed, and used up within a month.

PRINTING INDEX:

- compatible
- △ testing required
- × not compatible

(ECO) SOLVENT	UV CURABLE	LATEX	DYE/PIGMENT	OFFSET/FLEXO	SCREEN PRINT	TONER BASED
○	○	×	×	○	○	×

SPECIFICATION DATA:

PART NO.	MAGNET THICKNESS (INCH/MM)	TOTAL THICKNESS (INCH/MM)	WEIGHT (G/M2)	MAGNETIC DATA	
				BH(MAX)	PULL STRENGTH
NM-MWC-019...	.015"/0.38mm	.019"/0.48mm	1554	0.50-0.65	≥20g/cm ²
NM-MWC-024...	.020"/0.51mm	.024"/0.61mm	2011	0.50-0.65	≥27g/cm ²
NM-MWC-034...	.030"/0.76mm	.034"/0.86mm	2926	0.50-0.65	≥45g/cm ²
NMA-MWC-019...	.015"/0.38mm	.019"/0.48mm	1554	1.35-1.50	≥35g/cm ²
NMA-MWC-024...	.020"/0.51mm	.024"/0.61mm	2011	1.35-1.50	≥48g/cm ²
NMA-MWC-034...	.030"/0.76mm	.034"/0.86mm	2926	1.35-1.50	≥70g/cm ²